

# FH33 RH33/43

## Raise Your Sights

The FH33 brings the fire closer to you. Its tall combustion chamber is designed to let the fire unconfined, so you benefit from the entire height of its dramatic flame effects. Minimalist design gives the FH33 a look of refined purity. The extended height of the door permits a tall, uncluttered aperture, so the logs may be loaded vertically or horizontally.

An inner door made of cast iron, able to remain stable in extremes of heat, ensures a perfect and durable airtight seal, while a heavy steel outer door embellishes the facade of the stove. The outer door is available with an optional nickel plated finish, meticulously applied by expert artisans.

1



2



## Rise to the Occasion

The well balanced length-to-height ratio of the RH33 creates elegant, tall and extended proportions. Naturally sober, it lets the fire speak for itself.

The largest stove in the range, the RH43 has bold dimensions which accentuate the width and reduce the overall impression of height. Its ample firebox is able to heat large spaces while offering a spectacular view of the fire. Both models offer the possibility of either horizontal or vertical loading of the logs

3



4



5



## PERFORMANCE

FH33 : E : 81% / O : 3-14 kW - RH33 : E : 81% / O : 3-14 kW - RH43 : E : 77% / O : 3-14 kW

1

**FH33**  
Graphite

2

**FH33**  
Nickel

3

**RH33**  
Graphite

4


**RH43**  
Alumat

5

**RH43**  
Graphite



**TLH33**  
Graphite



# TFH33 TLH33

## Elegance and Flexibility

The modern lines of the TFH model give it an elegant simplicity which allows it to blend easily with any interior. Its sleek styling will make it an admired feature of your home, even when not alight. Mounted on a steel pedestal, the TFH can rotate 360° so that the fire may be viewed from any corner of the room.

Like all of the Woodbox stoves, The TFH features a double heating body, lined with cast iron for durability and efficient combustion. Each of its internal components can be easily removed for maintenance.

1



2



## Modern Design... with a Spin

The TLH model is the perfect centrepiece for the contemporary home. Its heavy steel body gives it strong presence and projects robustness. A convenient log-store stand is delivered as standard equipment, and serves as the base for the stove's 360° rotational system.

Its patented Woodbox combustion system ensures perfect secondary combustion, high efficiency and clean window glass. It also allows for precise control of the stove's burning rate.

3



4



## PERFORMANCE

TFH33 : E : 81% / O : 3-14 kW - TLH33 : E : 81% / O : 3-14 kW

1

**TFH33**  
Graphite

2

**TFH33**  
Nickel

3

**TLH33**  
Graphite

4

**TLH33**  
Nickel



**C33**  
Graphite

# C23 33/43

## It's Time for Something New

The C model is a fresh, modern take on the classic cast iron stove. Rounded lines gracefully outline the robust castings, which subtly hide the technical advances concealed within.

Nestor Martin's cast iron is renowned worldwide for its exceptional quality. Since the beginnings of our first foundry in 1854, our production process has always been at the avant-garde. Moreover, our cast iron is made with 95% recycled materials, in keeping with our commitment to protect the natural environment.

1



2



3



## PERFORMANCE

C23 : E : 77% / O : 1,5-9 kW - C33 : E : 80% / O : 2-12 kW - C43 : E : 80% / O : 2,5-14 kW

1

**C23**  
Graphite

2

**C33**  
Graphite

3

**C43**  
Graphite

## PRODUCT SPECIFICATIONS:

Models : FH33 / RH33/43 / TFH33 / TLH33

FH33	RH33	TFH33	TLH33
	RH43		

## TECHNICAL DATA:

	FH33	RH33	RH43	TFH33	TLH33
Min.-max. heat output	3 - 14 kW	3 - 14 kW	4 - 16 kW	3 - 14 kW	3 - 14 kW
Heat output to EN13240	9 kW	9 kW	12 kW	9 kW	9 kW
Heating capacity	360 m <sup>3</sup>	360 m <sup>3</sup>	480 m <sup>3</sup>	360 m <sup>3</sup>	360 m <sup>3</sup>
Efficiency rating	81%	81%	77%	81%	81%
CO Emissions	0,08%	0,08%	0,08%	0,08%	0,08%
Flue diameter	180 mm	180 mm	180 mm	180 mm	180 mm
Maximum log length	550 mm vert./400 mm horiz.	550 mm vert./400 mm horiz.	550 mm vert./400 mm horiz.	550 mm vert./400 mm horiz.	550 mm vert./400 mm horiz.
Weight	143 kg	143 kg	143 kg	143 kg	335 kg
Certification	EN 13240	EN 13240	EN 13240	EN 13240	EN 13240


## STANDARD FEATURES:

Woodbox combustion technology
Top or rear flue connection
Outside air ready
Cast iron door and interior
Clean glass system
Ashpan
Oscillating fuel grate
Optional remote control available
FH/TFH/TLH door colours: graphite or nickel plated
RH door colours: graphite or alumat silver


## PRODUCT SPECIFICATIONS:

Models : C23/33/43


C23

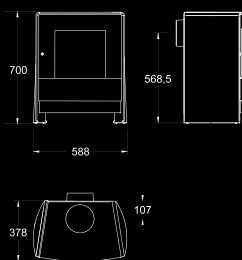

C33

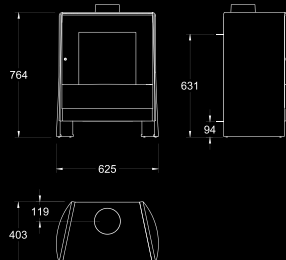

C43

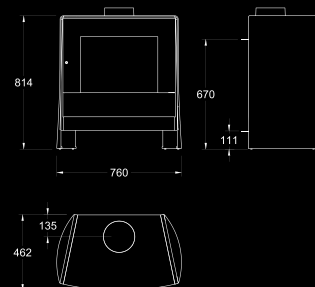

## TECHNICAL DATA:

	C23	C33	C43
Min.-max. heat output	1,5 - 9 kW	2 - 12 kW	2,5 - 14 kW
Heat output to EN13240	7 kW	9 kW	10,5 kW
Heating capacity	280 m³	360 m³	420 m³
Efficiency rating	77%	80%	80%
CO Emissions	0,13%	0,14%	0,06%
Flue diameter	150 mm	150 mm	180 mm
Maximum log length	330 mm	400 mm	500 mm
Weight	104 kg	195 kg	244 kg
Certification	EN 13240	EN 13240	EN 13240

## STANDARD FEATURES:

Woodbox combustion technology

Top or rear flue connection

Outside air ready

Cast iron combustion body

Cast iron door and interior

Clean glass system

Ashpan

Oscillating fuel grate

Optional remote control available

Standard finish : painted graphite



# INSERTS

The Nestor Martin insert models offer your home tremendous heat without losing any room space, making them a money-saving, ecological alternative to an open fire. Their distinct styling will make them the focal point of your home, while bringing you many years of warmth and comfort.

In addition to the comforting radiant heat they generate, Nestor Martin inserts feature a fan-assisted convection system to recover the warmth around the heating body and channel it into the home instead of up the chimney. This system may be set up to increase the flow of heat into the room, or into adjacent rooms of the home via flexible hot air tubes.



**IQ33**

# IQ 33/43

## Modernity in Form and Function

The IQ series is an expression of minimalist, avant-garde design, combined with the finest burn technology on the market.

The IQ/ IQH units offer an inset version of the same outstanding combustion bodies used on the TQ/ TQH freestanding units. They may be installed without a frame, running flush with the wall to make a statement in highly contemporary settings, or else with a variety of three- and four-sided frames.



Three-sided slim frame



Three-sided wide frame



Four-sided slim frame



Four-sided wide frame

1



Three-sided slim frame



Three-sided wide frame



Four-sided slim frame



Four-sided wide frame

2

## PERFORMANCE

IQ33 : E : 80% / O : 2-12 kW - IQ43 : E : 80% / O : 2,5-14 kW

1

**IQ33**  
Graphite

2

**IQ43**  
Graphite



**IQH43**

# IQH13

# IQH33/43

## A Class of its Own

The striking design of the IQH lends this insert stove a bold, refined look that exudes performance and style.

The height and minimal steel surround of the IQH models further accentuates their elegant, tall and extended proportions, and allow the flames ample space to become the focal point of your living room.



Three-sided slim frame



Three-sided wide frame



Four-sided slim frame



Four-sided wide frame

1

2



Three-sided slim frame



Three-sided wide frame



Four-sided slim frame



Four-sided wide frame

3



Three-sided slim frame



Three-sided wide frame



Four-sided slim frame



Four-sided wide frame

## PERFORMANCE

IQH13 : E : 75% / O : 2-8 kW - IQH33 : E : 80% / O : 3-14 kW - IQH43 : E : 80% / O : 4-16 kW

1

**IQH13**  
Graphite

2

**IQH33**  
Graphite

2

**IQH43**  
Graphite



**ITH43**  
with nickel frame

# IT33/43

# ITH33/43

## The Embrace of Comfort

Classic lines with a touch of modernity give the IT enduring style, making it a distinguished centrepiece for hearth and home. Its patented Woodbox combustion system ensures perfect secondary combustion, high efficiency and clean window glass.

Like all of the Woodbox models, it features a double heating body, lined with cast iron for durability and efficient combustion. Each of these components can be easily removed for maintenance.

1



2



## Aim Higher

The classic forms of the ITH inserts give no evidence as to the extraordinary technology packed inside. Their four-sided frame is delivered as standard equipment and is available with either a painted graphite or nickel plated finish.

The added height of the ITH models allows for a splendidly enhanced view of the fire. Their high glass window offers a stunning view of the full height of the flames, as well as increased frontal radiant heat.

3



4



## PERFORMANCE

IT33 : E : 80% / O : 2-12 kW - IT43 : E : 80% / O : 2,5-14 kW - ITH33 : E : 80% / O : 3-14 kW - ITH43 : E : 79% / O : 4-16 kW

1

IT33  
graphite

2

IT43  
graphite

3


ITH33  
graphite

4


ITH43  
graphite

## PRODUCT SPECIFICATIONS:

Models : IQ33/43 / IQH13/IQH33/IQH43

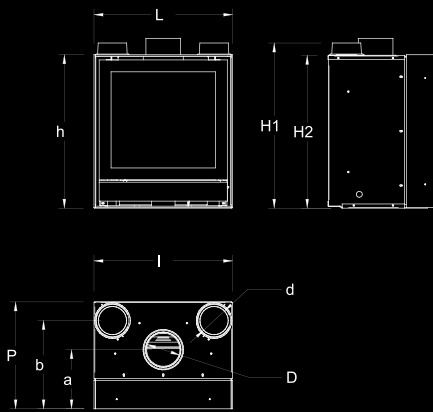

## DIMENSIONS AVEC CADRES

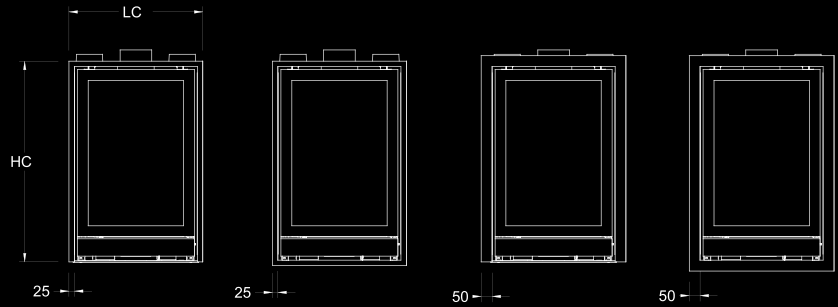

	<b>IQ33</b>	<b>IQ43</b>	<b>IQH13</b>	<b>IQH33</b>	<b>IQH43</b>
	LC / HC	LC / HC	LC / HC	LC / HC	LC / HC
Cadre 3 côtés largeur 25 mm	618 / 661	726 / 683	618 / 927	618 / 927	726 / 863
Cadre 4 côtés largeur 25 mm	618 / 678	726 / 700	618 / 944	618 / 944	726 / 880
Cadre 3 côtés largeur 50 mm	668/686	776 / 708	668 / 952	668 / 952	776 / 888
Cadre 4 côtés largeur 50 mm	668 / 728	776 / 750	668 / 994	668 / 994	776 / 930

## TECHNICAL DATA:


	<b>IQ33</b>	<b>IQ43</b>	<b>IQH13</b>	<b>IQH33</b>	<b>IQH43</b>
Min.-max. heat output	2 - 12 kW	2,5 - 14 kW	2 - 8 kW	3 - 14 kW	4 - 16 kW
Heat output to EN13240	9 kW	10,5 kW	6,5 kW	9 kW	12 kW
Heating capacity	360 m <sup>3</sup>	420 m <sup>3</sup>	260 m <sup>3</sup>	360 m <sup>3</sup>	480 m <sup>3</sup>
Efficiency rating	80%	80%	75%	81%	77%
CO Emissions	0,135%	0,06%	0,1%	0,08%	0,08%
Flue diameter	150 mm	180 mm	125 mm	180 mm	180 mm
Maximum log length	400 mm	550 mm	550 mm vert./330 mm horiz.	550 mm vert./400 mm horiz.	550 mm vert./500 mm horiz.
Weight	135 kg	182 kg	146 kg	178 kg	197 kg
Certification	EN 13229	EN 13229	EN 13229	EN 13240	EN 13229
L [mm]	584	692	442	584	692
H1 [mm]	695	717	908	961	897
H2 [mm]	643	668	868	909	845
h [mm]	644	666	871	912	848
I [mm]	583	691	442	583	691
P [mm]	450	498	444	450	498
b [mm]	371	421	379	371	421
a [mm]	249	280	232	249	280
D [mm]	150	180	125	150	180
d [mm]	120	120	100	120	120

## STANDARD FEATURES:

- Woodbox combustion technology
- Outside air ready
- Heat-reactive white cast iron interior
- Cast iron door
- Clean glass system
- Ashpan / Fan included
- Three and four-sided frame options
- Optional remote control available

## PRODUCT SPECIFICATIONS:

Models : IT33/IT43 / ITH33/ITH43

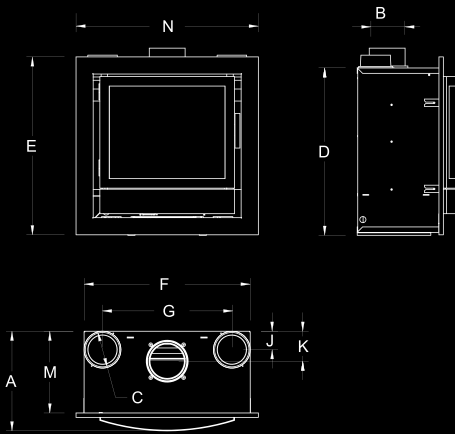

## TECHNICAL DATA:

	IT33	IT43	ITH33	ITH43
Min.-max. heat output	2 - 12 kW	2,5 - 14 kW	3 - 14 kW	4 -16 kW
Heat output to EN13240	9 kW	10,5 kW	9 kW	12 kW
Heating capacity	360 m <sup>3</sup>	420 m <sup>3</sup>	360 m <sup>3</sup>	480 m <sup>3</sup>
Efficiency rating	80%	80%	80%	79%
CO Emissions	0,14%	0,06%	0,07%	0,14%
Flue diameter	150 mm	180 mm	150 mm	180 mm
Maximum log length	400 mm	500 mm	550 mm vert./380 mm horiz.	550 mm vert./500 mm horiz.
Weight	129 kg	135 kg	142 kg	190 kg
Certification	EN 13229	EN 13229	EN 13229	EN 13229
A [mm]	406	473	406	473
B [mm]	146 ext.	176 ext.	146 ext.	176 ext.
C [mm]	125	125	125	125
D [mm]	670	706	767	877
E [mm]	725	749	822	929
F [mm]	677	797	677	797
G [mm]	527	647	527	647
J [mm]	75	75	75	75
K [mm]	122	139	122	139
M [mm]	336	380	336	380
N (mm)	743	852	743	852

## STANDARD FEATURES:

- Woodbox combustion technology
- Cast iron interior
- Oscillating fuel grate
- Clean glass system
- Ashpan / Fan included
- Four-sided frame
- Frame colours: graphite or nickel plated
- Optional remote control available