

VSEBINA – hitri pregled ponudbe

ROMOTOP – VLOŽKI NA DRVA



KV 055 A CAI



KV 055 B CAI



KV 055BN



KV 055AN



KV065AN



**ANGLE AL2LE01
ANGLE AR2LE 01**



**ANGLE AL2SE01
ANGLE AR2SE01**



**ANGLE AL2LE05
ANGLE AR2LE05**



**ANGLE AL2SE05
ANGLE AR2SE05**

KV 055 A CAI



CAI = centralni dovod zraka

Višina

1451 mm

Širina

968 mm

Globina

520 mm

Teža

235 kg

Moč

6 -18 kW

Premer dimniškega priključka

180 mm

Volumen ogrevanja

150 - 250 m³

Vlek

12 Pa

Izkoristek

82 %

Povprečna poraba drv

3,5 kg / h

Stone d.o.o., Razstavni salon, Zaloška 54, 1000 Ljubljana

Telefon: 01 54 27 260

Fax: 01 54 27 264

E-mail: salon@stone.si

<http://www.peci-kamini.com>

KV 055 B CAI



CAI = centralni dovod zraka

Višina	1451 mm
Širina	747 mm
Globina	520 mm
Teža	200 kg
Moč	4-16 kW
Premer dimniškega priključka	180 mm
Volumen ogrevanja	150 - 230 m ³
Vlek	12 Pa
Izkoristek	82 %
Povprečna poraba drv	3,5 kg / h

Stone d.o.o., Razstavni salon, Zaloška 54, 1000 Ljubljana

Telefon: 01 54 27 260

Fax: 01 54 27 264

E-mail: salon@stone.si

<http://www.peci-kamini.com>

TermoStone

KV 055BN CAI - dvižna vrata



© Romotop



© Romotop



© Romotop

CAI = centralni dovod zraka

Višina

1432 mm

Širina

793 mm

Globina

588 mm

Teža

255 kg

Moč

4-16 kW

Premer dimniškega priključka

180 mm

Volumen ogrevanja

150 - 230 m³

Vlek

12 Pa

Izkoristek

86 %

Povprečna poraba drv

3,5 kg / h

Stone d.o.o., Razstavni salon, Zaloška 54, 1000 Ljubljana

Telefon: 01 54 27 260

Fax: 01 54 27 264

E-mail: salon@stone.si

<http://www.peci-kamini.com>

TermoStone

KV 055AN CAI – dvižna vrata



CAI = centralni dovod zraka

Višina

1432 mm

Širina

1013 mm

Globina

588 mm

Teža

295 kg

Moč

6-18
kW

Premer dimniškega priključka

180 mm

Volumen ogrevanja

150 - 250 m³

Vlek

12 Pa

Izkoristek

80 %

Povprečna poraba drv

3,5 kg / h

Stone d.o.o., Razstavni salon, Zaloška 54, 1000 Ljubljana

Telefon: 01 54 27 260

Fax: 01 54 27 264

E-mail: salon@stone.si

<http://www.peci-kamini.com>

KV 065AN – dvižna vrata



© Romotop



© Romotop

CAI = centralni dovod zraka

Višina

1432 mm

Širina

1234 mm

Globina

588 mm

Teža

338 kg

Moč

6-18kW

Premer dimniškega priključka

250 mm

Volumen ogrevanja

150 - 270 m³

Vlek

12 Pa

Izkoristek

82 %

Povprečna poraba drv

3,5 kg / h

Stone d.o.o., Razstavni salon, Zaloška 54, 1000 Ljubljana

Telefon: 01 54 27 260

Fax: 01 54 27 264

E-mail: salon@stone.si

<http://www.peci-kamini.com>

TermoStone

ANGLE AL2LE01 – levi kotni
ANGLE AR2LE01 – desni kotni
dvižno odpiranje, enojno kotno steklo



CAI = centralni dovod zraka

Višina

1 430 mm

Širina

743 mm

Globina

605 mm

Teža

265 kg

Moč

4-16

kW

Premer dimniškega priključka

200 mm

Volumen ogrevanja

150 - 250 m³

Vlek

12 Pa

Izkoristek

84 %

Povprečna poraba drv

2,52

kg / h

Stone d.o.o., Razstavni salon, Zaloška 54, 1000 Ljubljana

Telefon: 01 54 27 260

Fax: 01 54 27 264

E-mail: salon@stone.si

<http://www.peci-kamini.com>

TermoStone

ANGLE AL2SE01 – levi kotni
ANGLE AR2SE01 – desni kotni
stransko odpiranje, enojno kotno steklo



© Romotop



© Romotop

CAI = centralni dovod zraka

Višina

1348 mm

Širina

741 mm

Globina

568 mm

Teža

195 kg

Moč

4-16 kW

Premer dimniškega priključka

200 mm

Volumen ogrevanja

150 - 250 m³

Vlek

12 Pa

Izkoristek

84 %

Povprečna poraba drv

2,52 kg / h

Stone d.o.o., Razstavni salon, Zaloška 54, 1000 Ljubljana

Telefon: 01 54 27 260

Fax: 01 54 27 264

E-mail: salon@stone.si

<http://www.peci-kamini.com>

TermoStone

ANGLE AL2LE05 – levi kotni

ANGLE AR2LE05 – desni kotni

dvižno odpiranje, deljeno steklo s kotnim mostičkom



© Romotop



© Romotop

CAI = centralni dovod zraka

Višina

1430 mm

Širina

743 mm

Globina

605 mm

Teža

265 kg

Moč

4-16 kW

Premer dimniškega priključka

200 mm

Volumen ogrevanja

150 - 250 m³

Vlek

12 Pa

Izkoristek

84 %

Povprečna poraba drv

2,52 kg / h

Stone d.o.o., Razstavni salon, Zaloška 54, 1000 Ljubljana

Telefon: 01 54 27 260

Fax: 01 54 27 264

E-mail: salon@stone.si

<http://www.peci-kamini.com>

TermoStone

ANGLE AL2SE05 – levi kotni

ANGLE AR2SE05 – desni kotni

stransko odpiranje, deljeno steklo s kotnim mostičkom



© Romotop



© Romotop

CAI = centralni dovod zraka

Višina

1348 mm

Širina

741 mm

Globina

568 mm

Teža

195 kg

Moč

4-16 kW

Premer dimniškega priključka

200 mm

Volumen ogrevanja

150 - 250 m³

Vlek

12 Pa

Izkoristek

84 %

Povprečna poraba drv

2,52 kg / h

Stone d.o.o., Razstavni salon, Zaloška 54, 1000 Ljubljana

Telefon: 01 54 27 260

Fax: 01 54 27 264

E-mail: salon@stone.si

<http://www.peci-kamini.com>

NESTOR MARTIN



IQ 33/43

Modernity in Form and Function

The IQ series is an expression of minimalist, avant-garde design, combined with the finest burn technology on the market.

The IQ/ IQH units offer an inset version of the same outstanding combustion bodies used on the TQ/ TQH freestanding units. They may be installed without a frame, running flush with the wall to make a statement in highly contemporary settings, or else with a variety of three- and four-sided frames.



Three-sided slim frame



Three-sided wide frame



Four-sided slim frame



Four-sided wide frame

1



Three-sided slim frame



Three-sided wide frame



Four-sided slim frame



Four-sided wide frame

2

PERFORMANCE

IQ33 : E : 80% / O : 2-12 kW - IQ43 : E : 80% / O : 2,5-14 kW

1

IQ33
Graphite

2

IQ43
Graphite



IQH43

IQH13

IQH33/43

A Class of its Own

The striking design of the IQH lends this insert stove a bold, refined look that exudes performance and style.

The height and minimal steel surround of the IQH models further accentuates their elegant, tall and extended proportions, and allow the flames ample space to become the focal point of your living room.



Three-sided slim frame



Three-sided wide frame



Four-sided slim frame



Four-sided wide frame

1



Three-sided slim frame



Three-sided wide frame



Four-sided slim frame



Four-sided wide frame

2



Three-sided slim frame



Three-sided wide frame



Four-sided slim frame



Four-sided wide frame

3

PERFORMANCE

IQH13 : E : 75% / O : 2-8 kW - IQH33 : E : 80% / O : 3-14 kW - IQH43 : E : 80% / O : 4-16 kW

1

IQH13
Graphite

2

IQH33
Graphite

2

IQH43
Graphite



ITH43
with nickel frame

IT33/43

ITH33/43

The Embrace of Comfort

Classic lines with a touch of modernity give the IT enduring style, making it a distinguished centrepiece for hearth and home. Its patented Woodbox combustion system ensures perfect secondary combustion, high efficiency and clean window glass.

Like all of the Woodbox models, it features a double heating body, lined with cast iron for durability and efficient combustion. Each of these components can be easily removed for maintenance.

1



2



Aim Higher

The classic forms of the ITH inserts give no evidence as to the extraordinary technology packed inside. Their four-sided frame is delivered as standard equipment and is available with either a painted graphite or nickel plated finish.

The added height of the ITH models allows for a splendidly enhanced view of the fire. Their high glass window offers a stunning view of the full height of the flames, as well as increased frontal radiant heat.

3



4



PERFORMANCE

IT33 : E : 80% / O : 2-12 kW - IT43 : E : 80% / O : 2,5-14 kW - ITH33 : E : 80% / O : 3-14 kW - ITH43 : E : 79% / O : 4-16 kW

1

IT33
graphite

2

IT43
graphite

3

ITH33
graphite



4

ITH43
graphite

PRODUCT SPECIFICATIONS:

Models : IQ33/43 / IQH13/IQH33/IQH43

DIMENSIONS AVEC CADRES

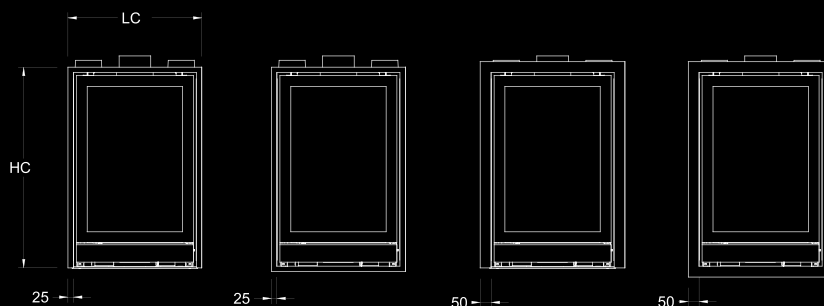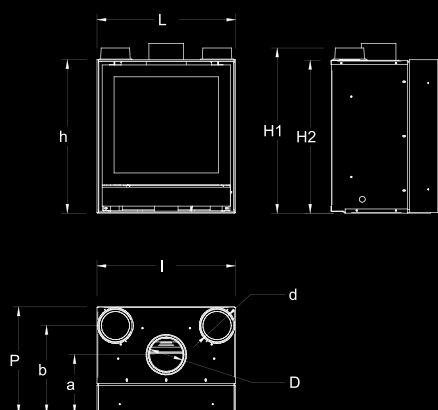

	IQ33	IQ43	IQH13	IQH33	IQH43
	LC / HC	LC / HC	LC / HC	LC / HC	LC / HC
Cadre 3 côtés largeur 25 mm	618 / 661	726 / 683	618 / 927	618 / 927	726 / 863
Cadre 4 côtés largeur 25 mm	618 / 678	726 / 700	618 / 944	618 / 944	726 / 880
Cadre 3 côtés largeur 50 mm	668/686	776 / 708	668 / 952	668 / 952	776 / 888
Cadre 4 côtés largeur 50 mm	668 / 728	776 / 750	668 / 994	668 / 994	776 / 930

TECHNICAL DATA:


	IQ33	IQ43	IQH13	IQH33	IQH43
Min.-max. heat output	2 - 12 kW	2,5 - 14 kW	2 - 8 kW	3 - 14 kW	4 - 16 kW
Heat output to EN13240	9 kW	10,5 kW	6,5 kW	9 kW	12 kW
Heating capacity	360 m³	420 m³	260 m³	360 m³	480 m³
Efficiency rating	80%	80%	75%	81%	77%
CO Emissions	0,135%	0,06%	0,1%	0,08%	0,08%
Flue diameter	150 mm	180 mm	125 mm	180 mm	180 mm
Maximum log length	400 mm	550 mm	550 mm vert./330 mm horiz.	550 mm vert./400 mm horiz.	550 mm vert./500 mm horiz.
Weight	135 kg	182 kg	146 kg	178 kg	197 kg
Certification	EN 13229	EN 13229	EN 13229	EN 13240	EN 13229
L [mm]	584	692	442	584	692
H1 [mm]	695	717	908	961	897
H2 [mm]	643	668	868	909	845
h [mm]	644	666	871	912	848
I [mm]	583	691	442	583	691
P [mm]	450	498	444	450	498
b [mm]	371	421	379	371	421
a [mm]	249	280	232	249	280
D [mm]	150	180	125	150	180
d [mm]	120	120	100	120	120

STANDARD FEATURES:

- Woodbox combustion technology
- Outside air ready
- Heat-reactive white cast iron interior
- Cast iron door
- Clean glass system
- Ashpan / Fan included
- Three and four-sided frame options
- Optional remote control available

PRODUCT SPECIFICATIONS:

Models : IT33/IT43 / ITH33/ITH43

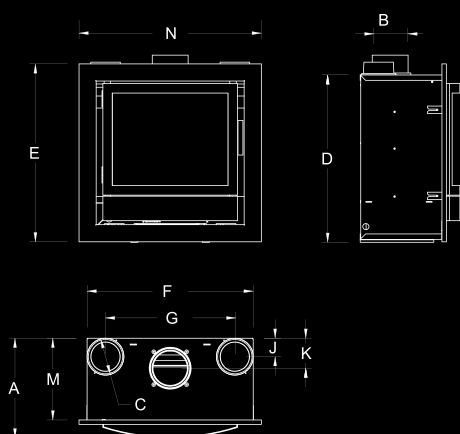

TECHNICAL DATA:

	IT33	IT43	ITH33	ITH43
Min.-max. heat output	2 - 12 kW	2,5 - 14 kW	3 - 14 kW	4 -16 kW
Heat output to EN13240	9 kW	10,5 kW	9 kW	12 kW
Heating capacity	360 m³	420 m³	360 m³	480 m³
Efficiency rating	80%	80%	80%	79%
CO Emissions	0,14%	0,06%	0,07%	0,14%
Flue diameter	150 mm	180 mm	150 mm	180 mm
Maximum log length	400 mm	500 mm	550 mm vert./380 mm horiz.	550 mm vert./500 mm horiz.
Weight	129 kg	135 kg	142 kg	190 kg
Certification	EN 13229	EN 13229	EN 13229	EN 13229
A [mm]	406	473	406	473
B [mm]	146 ext.	176 ext.	146 ext.	176 ext.
C [mm]	125	125	125	125
D [mm]	670	706	767	877
E [mm]	725	749	822	929
F [mm]	677	797	677	797
G [mm]	527	647	527	647
J [mm]	75	75	75	75
K [mm]	122	139	122	139
M [mm]	336	380	336	380
N [mm]	743	852	743	852

STANDARD FEATURES:

- Woodbox combustion technology
- Cast iron interior
- Oscillating fuel grate
- Clean glass system
- Ashpan / Fan included
- Four-sided frame
- Frame colours: graphite or nickel plated
- Optional remote control available

HAAS+SOHN


(+)





Elsass

Esprit 185.16-AL



	Elsass Rainbow	Elsass Ruivina
No	060185079	060185071
kW	3,5–7,0	3,5–7,0
kg	400	400
mm	see drawing/vedi schizzo/voir schéma	see drawing/vedi schizzo/voir schéma






FIRE PLACE SETS
CAMINETTI
CHEMINEES EN KITS



Rhone

Esprit 185.16-AL



Rhone Rainbow	Rhone Ruivina	
060185089	060185081	No
3,5–7,0	3,5–7,0	kW
400	400	kg
see drawing/vedi schizzo/voir schéma	see drawing/vedi schizzo/voir schéma	mm



Strassburg

Prestige 181.18 N-AL




Strassburg slate/
nero ardesia/ardoise



Strassburg
cotto



Strassburg
blue/blu/bleu



	No	060181021	060181023	060181024
 kW		4,0–8,0	4,0–8,0	4,0–8,0
 kg		460	460	460
 mm		see drawing/vedi schizzo/voir schéma	see drawing/vedi schizzo/voir schéma	see drawing/vedi schizzo/voir schéma






FIRE PLACE SETS
CAMINETTI
CHEMINÉES EN KITS



Lyon

Prestige 181.18 N-AL

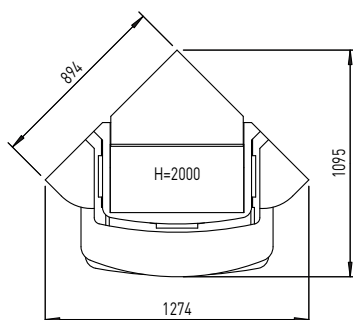


Lyon blue/blu/bleu	Lyon slate/ nero ardesia/ardoise	Lyon cotto	
060181014	060181011	060181013	No
4,0–8,0	4,0–8,0	4,0–8,0	kW
460	460	460	kg
see drawing/vedi schizzo/voir schéma	see drawing/vedi schizzo/voir schéma	see drawing/vedi schizzo/voir schéma	mm



Colmar

Exquisit 182.18-AL



	Colmar cotto	Colmar slate/ nero ardesia/ardoise
No	060182013	060182011
 kW	4,0–8,0	4,0–8,0
 kg	440	440
 mm	see drawing/vedi schizzo/voir schéma	see drawing/vedi schizzo/voir schéma






FIRE PLACE SETS
CAMINETTI
CHEMINÉES EN KITS



Sestriere

Trend 184.18-AL



Sestriere anthracite/
antracite/anthracite

060184032

No

4,0-8,0

kW

375

kg

see drawing/vedi schizzo/voir schéma

mm



FIRE PLACE SETS
CAMINETTI
CHEMINEES EN KITS




Lille

Trend 184.18-AL



Lille
Colorstone

No	060184040
kW	4,0–8,0
kg	425
mm	see drawing/vedi schizzo/voir schéma






FIRE PLACE SETS
CAMINETTI
CHEMINÉES EN KITS



Vichy

Trend 184.18-AL



Vichy
French natural stone Brétignac
Pietra naturale Brétignac
Pierre naturelle de Brétignac


060384010	No
4,0–8,0 kW	kW
1.040	kg
see drawing/vedi schizzo/voir schéma	mm



NEW
NOVITÀ
NOUVEAU


Avignon

Opus 186.18-AL

Avignon
Ruivina

No	060186000
kW	4,0–8,0
kg	460
mm	see drawing/vedi schizzo/voir schéma



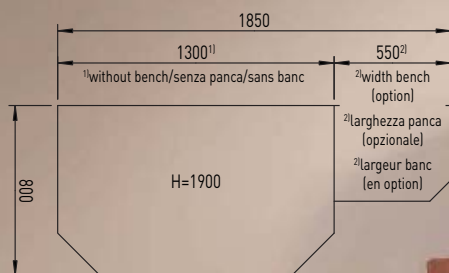

FIRE PLACE SETS
CAMINETTI
CHEMINÉES EN KITS



%
82



Adelboden

Prestige 181.18 N-AL



Bench (option)/Panca (opzioni)
Banc (option) +140 kg
cotto right/destra/droite
No. 065181032
blue right/blu destra/
bleu droite No. 065181034
cotto left/sinistra/gauche
No. 065181031
blue left/blu sinistra/
bleu gauche No. 065181033



Adelboden Set
blue incl. dome top
blu con cupola
bleu finition coupole

060181054

4,0-8,0

610

see drawing/vedi schizzo/voir schéma



Adelboden Set
blue incl. arched top
blu con arco
bleu finition demi-lune

060181044

4,0-8,0

610

see drawing/vedi schizzo/voir schéma



Adelboden Set
cotto incl. dome top
cotto con cupola
cotto finition coupole

060181053

4,0-8,0

610

see drawing/vedi schizzo/voir schéma



Adelboden Set
cotto incl. arched top
cotto con arco
cotto finition demi-lune

060181043

4,0-8,0

610

see drawing/vedi schizzo/voir schéma

No

kW

kg

mm






Megeve

Komfort 180.18-2-AL



Megeve
French natural stone Dordogne
Pietra naturale Dordogne
Pierre naturelle de Dordogne



No	060380060
 kW	4,0–8,0
 kg	670
 mm	see drawing/vedi schizzo/voir schéma






FIRE PLACE SETS
CAMINETTI
CHEMINEES EN KITS

NEW
NOVITÀ
NOUVEAU



Genf

Komfort 180.18-2-AL




Genf Ruivina	Genf Rainbow	No
060180041	060180049	
4,0–8,0	4,0–8,0	kW
430	430	kg
see drawing/vedi schizzo/voir schéma	see drawing/vedi schizzo/voir schéma	mm



Alpes

Komfort 180.18-2-AL



	Alpes Sireul
No	060380011
kW	4,0–8,0
kg	600
mm	see drawing/vedi schizzo/voir schéma

French Sireul stone with genuine wooden beam and Dutch clinkers

Pietra naturale "Sireul" con trave in legno e clinker olandese

En pierre naturelle "Sireul" avec poutres en bois et briques






FIRE PLACE SETS
CAMINETTI
CHEMINÉES EN KITS



Jura

Komfort 180.18-2-AL



French Sireul stone with genuine wooden beam and Dutch clinkers

Pietra naturale "Sireul" con trave in legno e clinker olandese

En pierre naturelle "Sireul" avec poutres en bois et briques

Jura
Sireul


060380021	No
4,0-8,0	kW
560	kg
see drawing/vedi schizzo/voir schéma	mm

FIRE PLACE SETS classic
CAMINETTI classic
CHEMINEES EN KITS classic



Genua

Komfort 180.18-2-AL



Genua
Ruivina

No	060180031
 kW	4,0–8,0
 kg	465
 mm	see drawing/vedi schizzo/voir schéma

Genuine beech beam
Trave in legno
Poutre en bois






FIRE PLACE SETS classic
CAMINETTI classic
CHEMINÉES EN KITS classic



Roma

Esprit 185.16-AL



Roma Ruivina	
060185011	No
3,5-7,0	kW
390	kg
see drawing/vedi schizzo/voir schéma	mm




Sylt



- Kaminbausätze aus Kunststein werden unbehandelt ausgeliefert und ermöglichen so eine individuelle Oberflächengestaltung.
- Kamineinsatz Esprit 185.16-AL mit Scheibenspülung.
- Optionales Brandschutz-Set (Art.-Nr. 64185070) für den Aufbau an eine tragende Stahlbetonwand oder Holzwand notwendig.
- Empfohlene Anschlussunterkante 1550 mm.

Kaminbausatz Sylt
Rainbow-Naturstein für Sockelplatten
unbehandelter Kunststein

No	060185099
kW	3,0–7,0
kg	480
mm	1900/1305/770

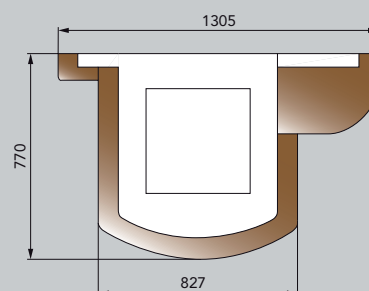




Cilento




- Kaminbausätze aus Kunststein werden unbehandelt ausgeliefert und ermöglichen so eine individuelle Oberflächengestaltung.
 - Kamineinsatz Esprit 185.16-AL mit Scheibenspülung.
- Optionales Brandschutz-Set (Art.-Nr. 064185050) für den Aufbau an eine tragende Stahlbetonwand oder Holzwand notwendig.
 - Empfohlene Anschlussunterkante 1550 mm.



Kaminbausatz Cilento
Anthrazit-Kunststein für Sockelplatten
unbehandelter Kunststein

0601185062	No	
3,0-7,0	kW	
440	kg	
1900/1160/770	mm	

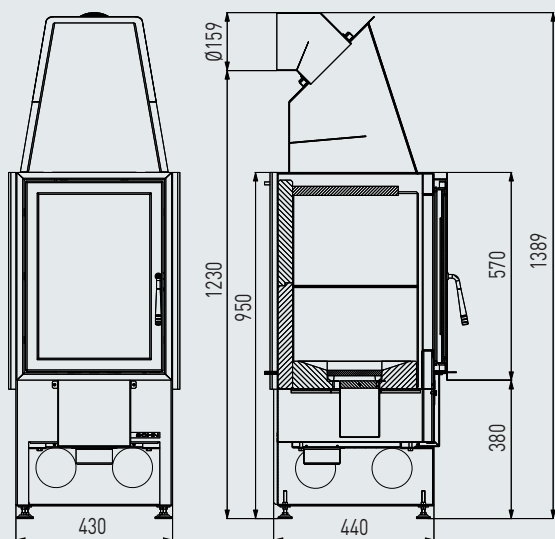

Attention: connecting heights may vary with different kits!
 Attenzione: le altezze di connessione possono variare con kits differenti!
 Attention: les hauteurs de raccordement peuvent varier en fonction des cheminées!




FIRE PLACE INSERTS
 INSERTI A CAMINETTI
 FOYERS



Esprit 185.16-AL



Esprit 185.16-AL	
flat pane/vetro piano/vitre plane	
061851603	No
3,5-7,0	kW
120	kg
see drawing vedi schizzo voir schéma	mm

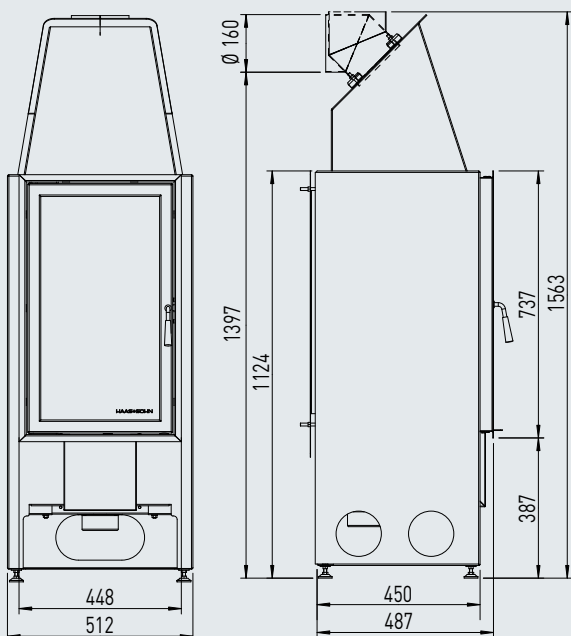

Attention: connecting heights may vary with different kits!
 Attenzione: le altezze di connessione possono variare con kits differenti!
 Attention: les hauteurs de raccordement peuvent varier en fonction des cheminées!





Trend 184.18-AL



Trend 184.18-AL	
flat pane/vetro piano/vitre plane	
061841801	No
4,0-8,0	kW
130	kg
see drawing vedi schizzo voir schéma	mm

FIRE PLACE INSERTS
INSERTI A CAMINETTI
FOYERS

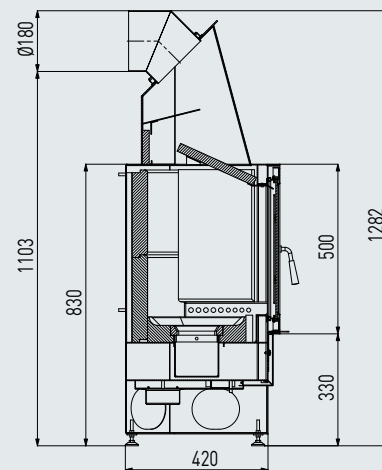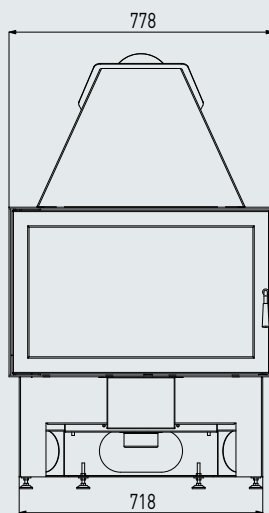

Attention: connecting heights may vary with different kits!

Attenzione: le altezze di connessione possono variare con kits differenti!

Attention: les hauteurs de raccordement peuvent varier en fonction des cheminées!

Komfort 180.18-AL





Komfort 180.18-AL
flat pane/vetro piano/vitre plane

No 061801804

 kW 4,0–8,0

 kg 155

 mm see drawing | vedi schizzo | voir schéma

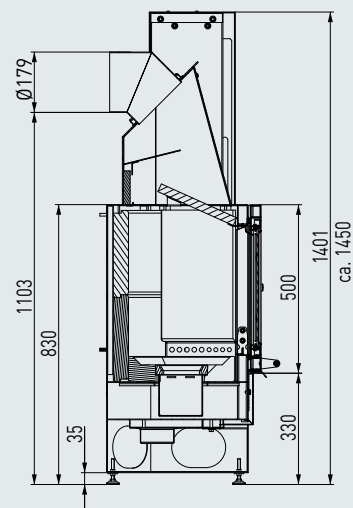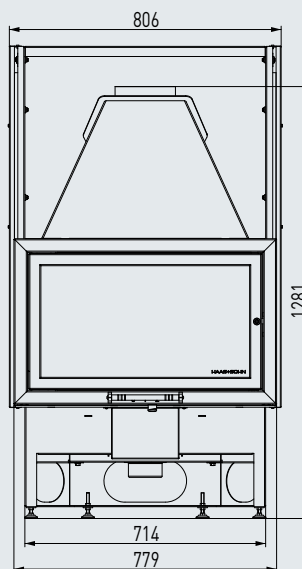

Attention: connecting heights may vary with different kits!

Attenzione: le altezze di connessione possono variare con kits differenti!

Attention: les hauteurs de raccordement peuvent varier en fonction des cheminées!

Opus 186.18/1-AL



Opus 186.18/1-AL


No 061861801

 kW 4,0–8,0

 kg 195

 mm see drawing | vedi schizzo | voir schéma



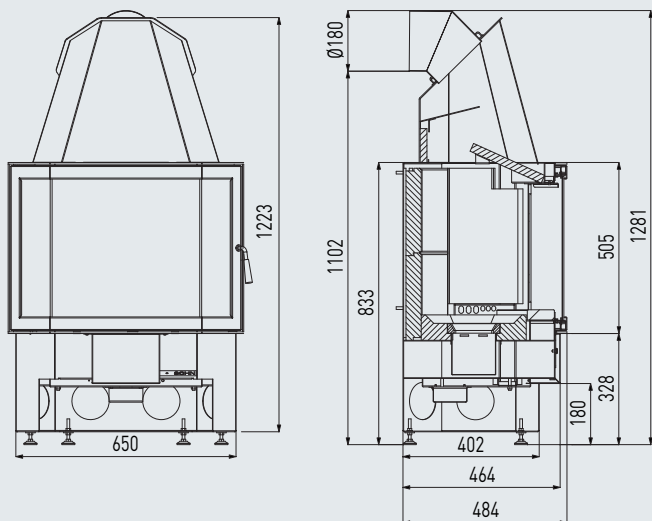

Attention: connecting heights may vary with different kits!
 Attenzione: le altezze di connessione possono variare con kits differenti!
 Attention: les hauteurs de raccordement peuvent varier en fonction des cheminées!




FIRE PLACE INSERTS
 INSERTI A CAMINETTI
 FOYERS

Prestige 181.18 N-AL



Prestige 181.18 N-AL	
prismatic pane/vetro prismatico/vitre prismatique	
061811801	No
4,0-8,0	kW
150	kg
see drawing vedi schizzo voir schéma	mm

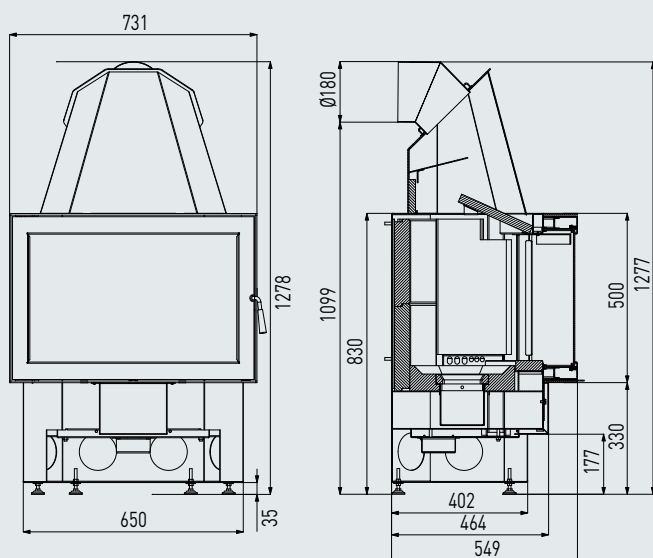

Attention: connecting heights may vary with different kits!
 Attenzione: le altezze di connessione possono variare con kits differenti!
 Attention: les hauteurs de raccordement peuvent varier en fonction des cheminées!



Exquisit 182.18-AL



Exquisit 182.18-AL	
curved pane/vetro arrotondato/vitre bombée	
061821801	No
4,0-8,0	kW
140	kg
see drawing vedi schizzo voir schéma	mm

 **SUPRA**
Le climat de confiance



[NEW]

Strong points

- The beauty of the fire, all in angles
- Output: 70% (Premium), 73% (Pack)
- Nominal output 11 kW (Premium) or 13 kW (Pack)
- Cast iron (40I) or brick (43I) lining
- Lift-up door
- Safety locking
- Side opening to facilitate cleaning of the glass
- "Clean glass" system
- Combustion air and valve control levers
- Options :
 - KTE 152 bi-turbo kit
 - Turbine kit KT 1455
 - KRT 260 A adapter (only with KT 1455)
 - Warm air nozzles Ø 150 mm
 - Warm air distributor cover CDA 450 A (on Premium)



CRISTAL 2-40I B-B

PREMIUM

-  "Flamme Verte" quality charter
-  Clean glass system
-  For 50 cm logs*
-  Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety
-  Brick interior
-  Heating body with cast iron lining
-  Optional air distributor
-  Flue valve: reduces wood consumption
-  Lift-up door

-  Support foot included
-  Automatic locking glass door
-  Smoke collector with Inoxis HR smoke baffle: helps concentrate the heat and amplifies the clean glass system
-  Smoke flue with collector: allows any condensate to be burned completely
-  2-point side door locking: gives a better seal
-  Levelling screws, for secure, stable installation
-  Anti-smoke compartment: recovers the smoke that billows out when the door is opened too quickly
-  Optional turbines
-  Surface heated (table p. 113)

PACK VERSION ADVANTAGES

-  Air distributor included
-  Bypass valve: new generation valve for better output
-  Post-combustion: the smoke is burnt a second time for better output
-  Pre-heating of the secondary air in a special heat exchanger
-  Inoxis THR heat exchanger unit: helps concentrate the heat and amplifies the clean glass system
-  IN'AIR connection module, for operation independently of the mechanical ventilation system
-  Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

[NEW]



CRISTAL 2-431 B-N

■ Premium version

- Nominal output: 11 kW
- "Triple envelope" airtight combustion chamber
- INOXIS HR smoke baffle

■ Pack version


- Nominal output: 13 kW
- IN'AIR module
- INOXIS THR heat exchanger with post-combustion
- Long-lasting fire
- Adjustable glass air
- Warm air distributor cover



"Push-Pull" levers

■ Ventilated Pack version

- Pack
- Warm air distribution with ventilation turbine

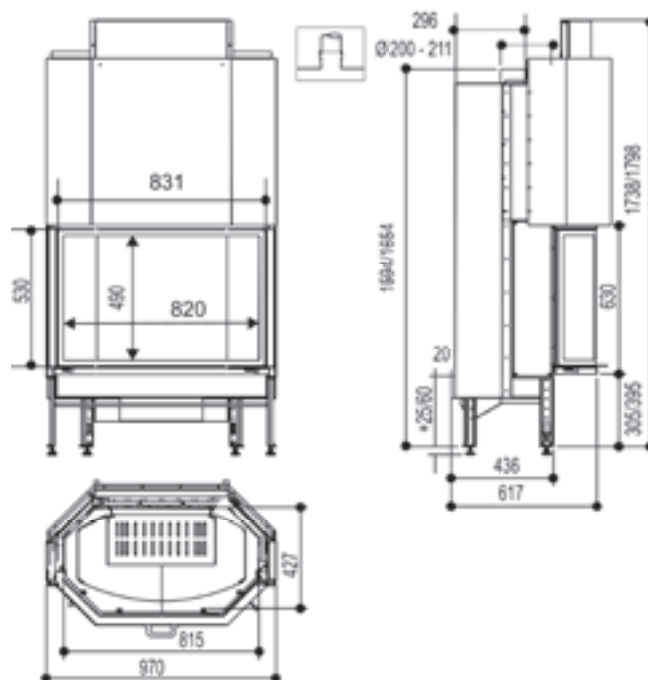

MODEL		CRISTAL 2-401				CRISTAL 2-431			
VIEW		PRISMATIC				PRISMATIC			
DOOR OPENING		LIFT-UP*				LIFT-UP*			
DOOR DESIGN		BLACK	REF.	BRASS	REF.	BLACK	REF.	BRASS	REF.
VERSIONS	PREMIUM	401 B - N	III280	401 B - B	III281	431 B - N	III283	431 B - B	III282
	PACK	401 B - PACK N 401 B - PACK VN	III290 III294	401 B - PACK B	III292	431 B - PACK N 431 B - PACK VN	III291 III295	431 B - PACK B	III293

(*) Side opening for easy cleaning of the glass.

Strong points

[NEW]

- The beauty of the fire, all in curves
- Output: 70% (Premium), 73% (Pack)
- Nominal output 11 kW (Premium) or 13 kW (Pack)
- Cast iron (501) or brick (531) lining
- Lift-up door
- Safety locking
- Side opening to facilitate cleaning of the glass
- "Clean glass" system
- Combustion air and valve control levers
- Options :
 - KTE 152 biturbo kit
 - KT 1455 turbine kit
 - KRT 260 A adapter (only with KT 1455)
 - Warm air nozzles Ø 150 mm
 - Warm air distributor cover CDA 450 A (on Premium)



Diadème 501 B-N

PREMIUM

-  "Flamme Verte" quality charter
-  Clean glass system
-  For 50 cm logs*
-  Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety
-  Brick interior
-  Heating body with cast iron lining
-  Optional air distributor
-  Flue valve: reduces wood consumption
-  Lift-up door

-  Support foot included
-  Automatic locking glass door
-  Smoke collector with Inaxis HR smoke baffle: helps concentrate the heat and amplifies the clean glass system
-  Smoke flue with collector: allows any condensate to be burned completely
-  2-point side door locking: gives a better seal
-  Levelling screws, for secure, stable installation
-  Anti-smoke compartment: recovers the smoke that billows out when the door is opened too quickly
-  Optional turbines
-  Surface heated (table p. 113)

PACK VERSION ADVANTAGES

-  Air distributor included
-  Bypass valve: new generation valve for better output
-  Post-combustion: the smoke is burnt a second time for better output
-  Pre-heating of the secondary air in a special heat exchanger
-  Inaxis THR heat exchanger unit: helps concentrate the heat and amplifies the clean glass system
-  IN'AIR connection module, for operation independently of the mechanical ventilation system
-  Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Diadème



[NEW]





Diadème 531 B-N

■ Premium version

- Nominal output: 11 kW
- "Triple envelope" airtight combustion chamber
- INOXIS HR smoke baffle

■ Pack version

- Nominal output: 13 kW
- IN'AIR module
- INOXIS THR heat exchanger with post-combustion
- Long-lasting fire
- Adjustable glass air
- Warm air distributor cover

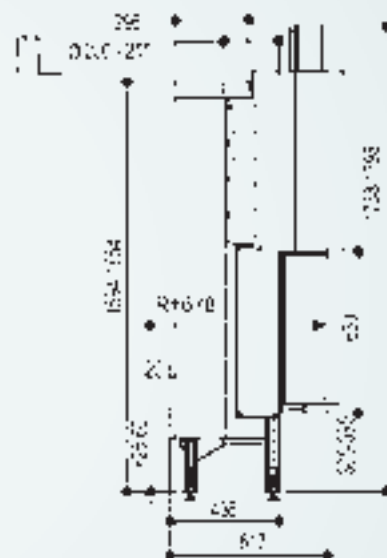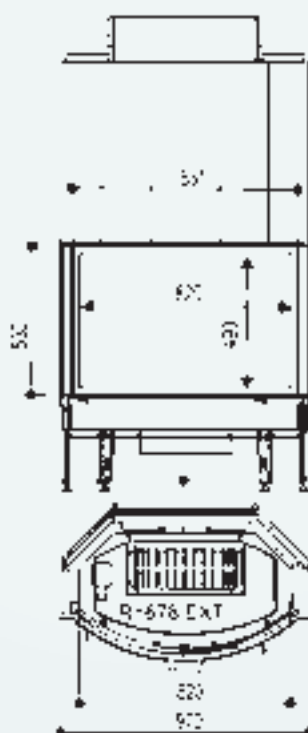

MODEL		DIADÈME 501		DIADÈME 531	
VIEW		CURVED		CURVED	
DOOR OPENING		LIFT-UP*		LIFT-UP*	
DOOR DESIGN		BLACK	REF.	BLACK	REF.
VERSIONS	PREMIUM	501 B - N	111302	531 B - N	111303
	PACK	501 B - PACK N 501 B - PACK VN	111310 111312	531 B - PACK N 531 B - PACK VN	111311 111313



"Push-Pull" levers

(*) Side opening for easy cleaning of the glass.

Strong points

- Fully enjoy the sight of the fire
- Output: 71% (Premium), 72% (Pack)
- Nominal output 11 kW (Premium) or 13 kW (Pack)
- Highly user friendly
- Optimised glass surface 71 x 51 cm
- Lift-up door for Univers 201-231 and side opening for easy to facilitate cleaning of glass
- Side opening for Univers 200-230
- Large ashpan 4.8 l.
- "Clean glass" system
- Options (all models except ventilated Pack):
 - KTE 152 biturbo kit
 - KT 1455 turbine
 - KRT 260 A adapter (only with KT 1455)
- Options (all models):
 - Warm air nozzles Ø 150 mm
 - ORFEO decorative front
 - Warm air distributor cover CDA 200 A (on Premium)



 UNIVERS 2-200 AD-PN



 UNIVERS 2-201 A-PACK PN

PREMIUM

-  "Flamme Verte" quality charter
-  French standard
-  Clean glass system
-  For 50 cm logs*
-  Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety
-  Brick interior
-  Heating body with cast iron lining
-  Optional air distributor
-  Flue valve: reduces wood consumption

-  Lift-up door
-  Support foot included
-  Smoke collector with Inoxis HR smoke baffle: helps concentrate the heat and improves the performance clean glass system
-  Smoke flue with collector: allows any condensate to be burned completely
-  2-point side door locking: gives a better seal
-  Levelling screws, for secure, stable installation
-  Anti-smoke compartment: recovers the smoke that billows out when the door is opened too quickly
-  Optional turbines
-  Surface heated (table p. 113)

PACK VERSION ADVANTAGES

-  Air distributor included
-  Bypass valve: new generation valve for better output
-  Post-combustion: the smoke is burnt a second time for better output
-  Pre-heating of the secondary air in a special heat exchanger
-  Inoxis THR heat exchanger unit: helps concentrate the heat and amplifies the clean glass system
-  IN'AIR connection module, for operation independently of the mechanical ventilation system
-  Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.



Adaptable to
the ORFEO
range of deco-
rative fronts

See page 10



UNIVERS 2-230 AD-PN




UNIVERS 2-231 A-PN

■ Premium version


- Nominal output: 11 kW
- "Triple envelope" airtight combustion chamber
- INOXIS HR smoke baffle

■ Pack version


- Nominal output: 13 kW
- IN'AIR module
- INOXIS THR heat exchanger with post-combustion
- Long-lasting fire
- Warm air distributor cover included

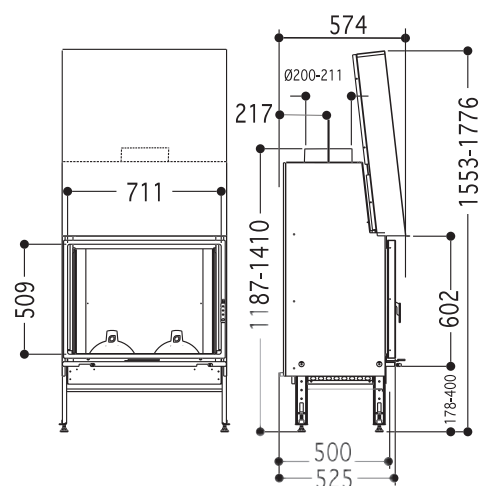

UNIVERS 2-201-231
Lift-up door

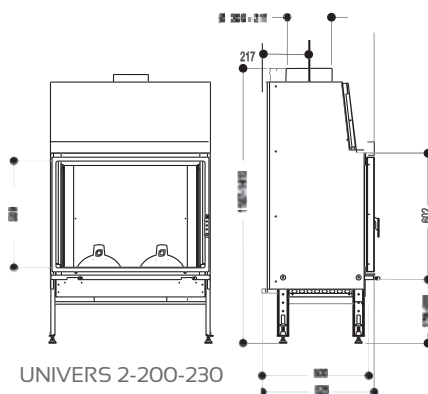

UNIVERS 2-200-230
Side door



MODEL		UNIVERS 2-200 / 201				UNIVERS 2-230 / 231			
DOOR OPENING		SIDE	REF.	LIFT-UP*	REF.	SIDE	REF.	LIFT-UP*	REF.
VERSIONS	PREMIUM	200 AD - PN	111535	201 A - PN	111502	230 AD - PN	111536	231 A - PN	111543
	PACK	200 AD - PACK PN 200 AD - PACK VPN	111537 111625	201 A - PACK PN 201 A - PACK VPN	111507 111627	230 AD - PACK PN	111538	231 A - PACK PN 231 A - PACK VPN	111544 111628

(*) Side opening for easy cleaning of the glass.



COSMOS
1520 ADN

COSMOS 1520 ADN

- Curved front
- Output 71 %
- Nominal output 8 kW
- "Triple envelope" heating body
- IN'AIR combustion module

- Cast iron door and inside; side opening
- Flue valve
- Large ashpan 3,9 l.
- Warm air distributor included
- "Clean glass" system
- INOXIS HR smoke baffle
- Optional:
 - KTE 152 biturbo kit





DIAMANT
1421 AN



DIAMANT 1421 AN

- Prismatic view of the fire
- Output 71 %
- Nominal output 9 kW
- "Triple envelope" heating body
- IN'AIR combustion module
- Cast iron interior

- Lift-up and side opening to facilitate cleaning of the glass
- Flue valve
- Large ashpan 3,9 l.
- "Clean glass" system
- Warm air distributor included
- Optional:
 - KTE 152 biturbo kit

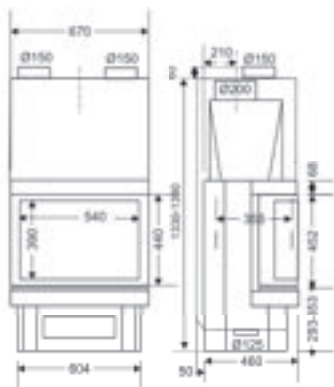

COSMOS
1520 ADN

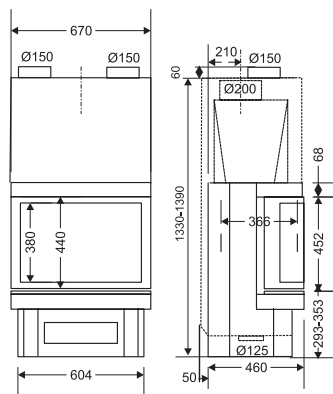

DIAMANT 1421 AN



MODEL	COSMOS 1520 ADN		DIAMANT 1421 AN	
VIEW	CURVED		PRISMATIC	
DOOR OPENING	SIDE	REF. 111828	LIFT-UP	REF. 111826

(*) Side opening for easy cleaning of the glass.



"Flamme Verte" quality charter



Clean glass system



For 50 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Heating body with cast iron lining



Air distributor included



Flue valve: reduces wood consumption



Lift-up door



Support foot included



IN'AIR connection module, for operation independently of the mechanical ventilation system



Levelling screws, for secure, stable installation



Optional turbines



Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

FV 40 D / FV 51

SUPRA




FV 40 D


FV 40 D

- Vertical view of the fire
- Output 75 %
- Nominal output 8 kW
- "Triple envelope" combustion chamber
- INOXIS THR smoke baffle

- Side opening
- Large easily removable ashpan
- Logs 40 cm (horizontally) or 50 cm max. (vertically)
- Optional warm air distributor

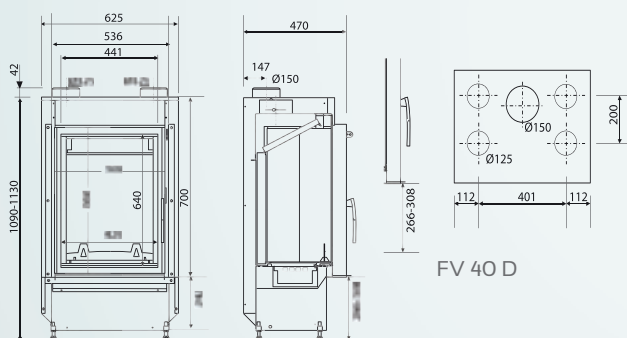

FV 40 D

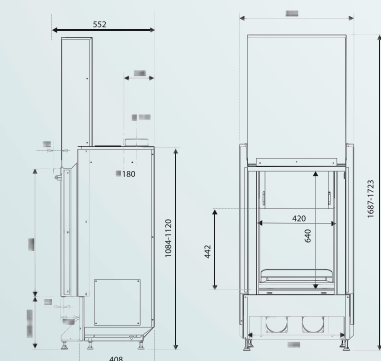

FV 51



FV 51

FV 51

- Vertical view of the fire
- Output 71 %
- Nominal output 9 kW
- "Triple envelope" combustion chamber
- IN'AIR combustion module
- INOXIS HR smoke baffle

- Glass door lifts up and tilts for cleaning
- Large easily removable ashpan
- Logs 40 cm (horizontally) or 50 cm max. (vertically)
- Warm air distributor included



"Flamme Verte" quality charter



Clean glass system



For 33 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Brick interior



Air distributor included (O optional on the FV 40)



Flue valve: reduces wood consumption



Lift-up door



Support foot included



Pre-heating of the secondary air in a special heat exchanger



Smoke collector with Innox HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



Innox THR heat exchanger unit: amplifies the concentration of the heat and allows double combustion



IN'AIR connection module, for operation independently of the mechanical ventilation system



Levelling screws, for secure, stable installation



Optional turbines



Surface heated (table p. 113)


MODEL	FV 40 D		FV 51	
DOOR OPENING	SIDE	REF. 111475	LIFT-UP*	REF. 111871
DIMENSIONS W x H x D	62 x 109 to 113 x 47		62 x 169 to 172 x 55	

(*) Side opening for easy cleaning of the glass.

* Indication of the standard size of logs on general sale.

Strong points

- Panoramic view of the fire
- Output 74 %
- Nominal output
11 kW / 10 kW (1800 D)
- Cast iron or brick interior
- Cast iron plates removable from the inside of the firebox
- Double-sided heating body (resists thermal shocks and provides total airtightness)
- Double safety locking
- Side opening (1800, 1800 D) or lift-up opening (1801, 1821, 1831)
- Flue valve
- Curved glass door
- "Clean glass" system
- Options :
 - KTE 152 biturbo kit
 - DA 1800
 - 2 extra hot air nozzles $\varnothing$ 150 mm

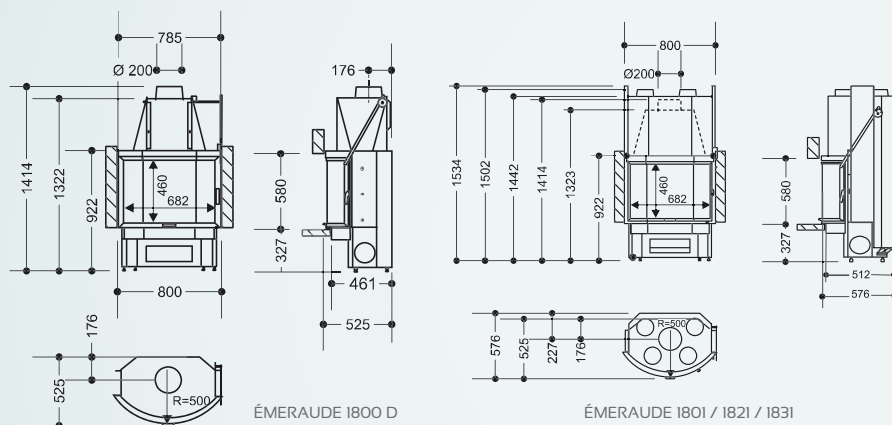

MODEL	ÉMERAUDE 1800		ÉMERAUDE 1801 / 1821 / 1831	
VIEW	CURVED		CURVED	
DOOR OPENING	SIDE	REF.	LIFT-UP*	REF.
	1800 / 1800 D	111357	1801	111358
			1821	111370
			1831	111372

(*) Side opening for easy cleaning of the glass.



ÉMERAUDE 1801



Brick interior



Heating body with cast iron lining



Optional air distributor



Flue valve:
reduces wood consumption



Lift-up door



Support foot included



Automatic locking glass door



Smoke collector with Inox HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



"Flamme Verte" quality charter



Clean glass system



For 50 cm logs*



Levelling screws, for secure, stable installation



Optional turbines





Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Strong points

- Fully enjoy the sight of the fire
- Output 74 %
- Nominal output
11 kW / 10 kW (1700 D)
- Cast iron or brick interior
- Cast iron plates removable
from the inside of the firebox
- Double-sided heating body
(resists thermal shocks and
provides total airtightness)
- Double safety locking
- Side opening (1700, 1700 D)
or lift-up opening
(1701, 1721, 1731)
- Flue valve
- Prismatic glass pane
- "Clean glass" system
- Options :
 - KTE 152 biturbo kit
 - DA 1700
 - 2 extra hot air nozzles
ø 150 mm

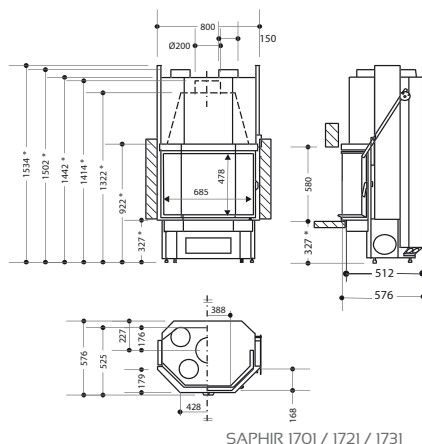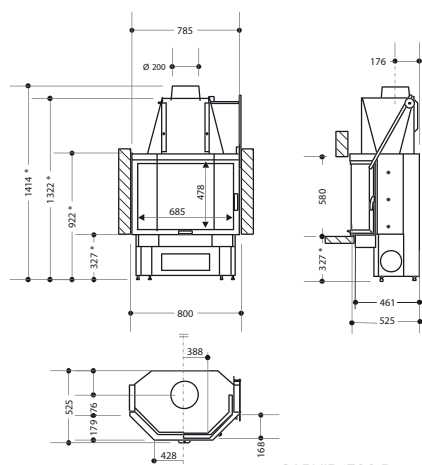

MODEL	1700		1701 / 1721 / 1731	
VIEW	PRISMATIC		PRISMATIC	
DOOR OPENING	SIDE	REF.	LIFT-UP*	REF.
	1700 / 1700 D	111351	1701	111352
			1721	111368
			1731	111355

(*) Side opening for easy cleaning of the glass.



SAPHIR 1701



Brick interior



Heating body with cast iron lining



Optional air distributor



Flue valve:
reduces wood consumption



Lift-up door



Support foot included



Automatic locking glass door



Smoke collector with Innoxis HR smoke
baffle: helps concentrate the heat and
amplifies the clean glass system



Levelling screws, for secure,
stable installation



Optional turbines



Surface heated (table p. 113)



"Flamme Verte" quality charter



Clean glass system




For 50 cm logs*

* Indication of the standard size of logs on general sale.

Strong points

- Square view of the fire
- Output 78 %
- Nominal output 9 kW
- "Triple envelope" combustion chamber
- Cast iron interior
- IN'AIR combustion module
- Lift-up opening
- Hot air distribution system included
- Flue valve
- Glass door tilts for cleaning
- Large easily removable ashpan
- "Clean glass" system

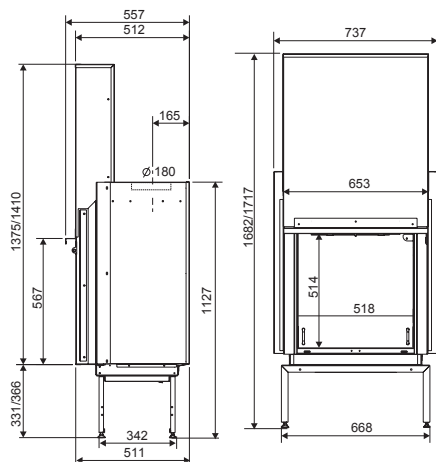

MODEL	CARAT 58		CARAT 58 R
DOOR OPENING	LIFT-UP*	REF. 111931	REF. 111932
DIMENSIONS W x H x D	74 x 168 TO 172 x 56		

(*) Side opening for easy cleaning of the glass.



CARAT 58 is also available in a connectable version CARAT 58 R.



"Flamme Verte" quality charter



Clean glass system



For 50 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Cast iron interior



Air distributor included



Flue valve: reduces wood consumption



Lift-up door



Support foot included



Pre-heating of the secondary air in a special heat exchanger



Smoke collector with Inoxis HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



IN'AIR connection module, for operation independently of the mechanical ventilation system



Levelling screws, for secure, stable installation



Optional turbines



Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.


Eclipse / Eclipse DF



Strong points

- Panoramic view of the fire (width of window 95 cm)
- Double panoramic view of the fire: 2 lift-up sides* (Eclipse DF)
- Output 70 % (Eclipse), 55 % (Eclipse DF)
- Nominal output 11 kW (Eclipse), 10 kW (Eclipse DF)
- Screen-printed finish
- Lift-up door with double-point side locking
- Rotary combustion control
- Large ashpan
- Flue valve
- "Clean glass" system
- Support foot adjustable up to 50 cm
- Optional:
 - DA 1000 (except Eclipse DF)

* The two sides must not be raised at the same time

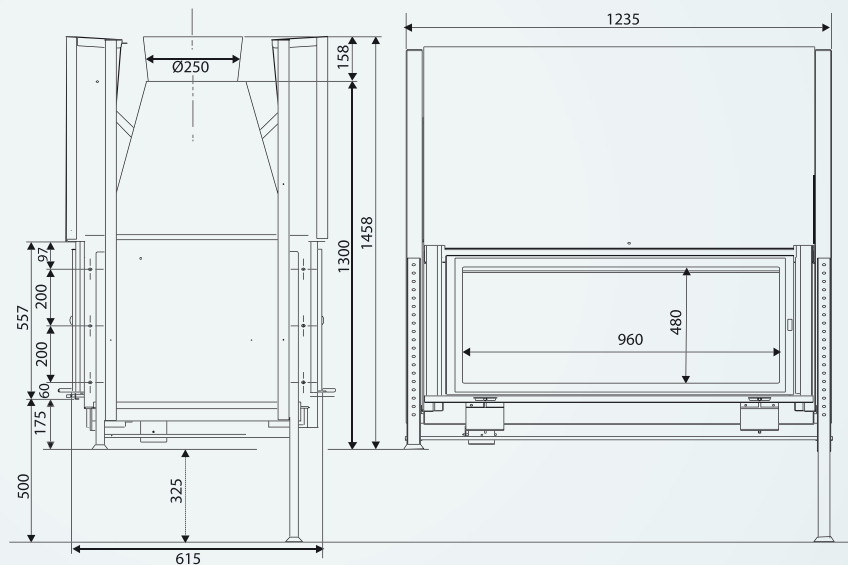

ECLIPSE DF



MODEL	ECLIPSE		ECLIPSE DF	
DOOR OPENING	LIFT-UP*	REF. 111850	LIFT-UP*	REF. 111873

(*) Side opening for easy cleaning of the glass.



"Flamme Verte" quality charter



Clean glass system



Brick interior



Flue valve: reduces wood consumption



Lift-up door



Support foot included




Levelling screws, for secure, stable installation



Surface heated (table p. 113)

Strong points

- Double-sided view of the fire for installation in the centre of a room
- Output 71 %
- Nominal output 10 kW
- Two glass sides
- Cast iron lining
- Side opening on both sides
- Lift-up door on one side
- Large ashpan 4,8 l.
- Warm air distributor fitted as standard (natural convection only)
- "Clean glass" system
- 2 warm air nozzles $\varnothing$ 150 mm included
- Optional:
 - ORFEO decorative front

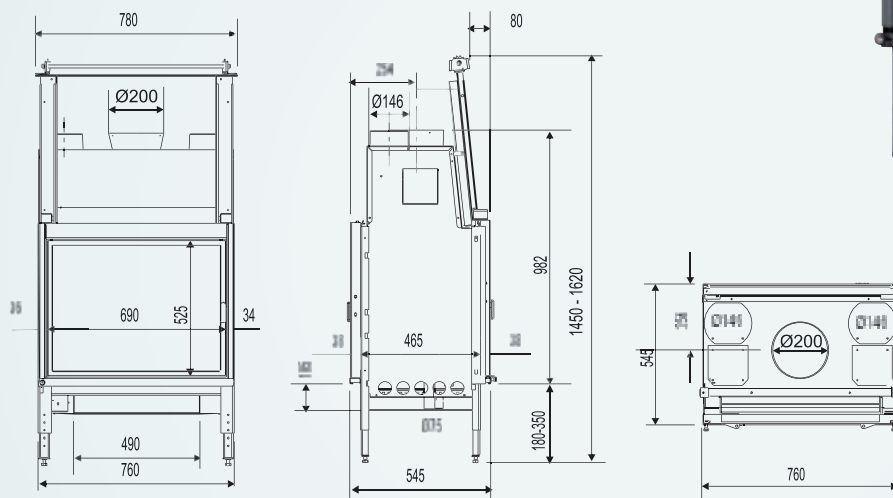

DF 583 N
1 Lift-up door
1 side-opening door



See page 10

MODEL	DF 583 N	
DOOR OPENING	LIFT-UP*	REF. III868

(*) Side opening for easy cleaning of the glass.



"Flamme Verte" quality charter



Clean glass system



For 50 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Heating body with cast iron lining



Air distributor included



Flue valve: reduces wood consumption



Lift-up door



Support foot included



Smoke flue with collector: allows any condensate to be burned completely



Levelling screws, for secure, stable installation




Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Strong points

- The beauty of the fire, all in angles
- Output 71 %
- Nominal output 11 kW
- Cast iron interior
- Possible diffusion of heat to other rooms
- Glass front + side(s)
- Chain-operated lift-up door; safe and robust
- Guided by ball bearings
- Very large capacity ashpan 7.4 l.
- "Clean glass" system
- Options :
 - Warm air nozzles $\varnothing$ 150 mm
 - KT 1455 + KRT 255 turbine
 - Warm air distributor cover CDA 255

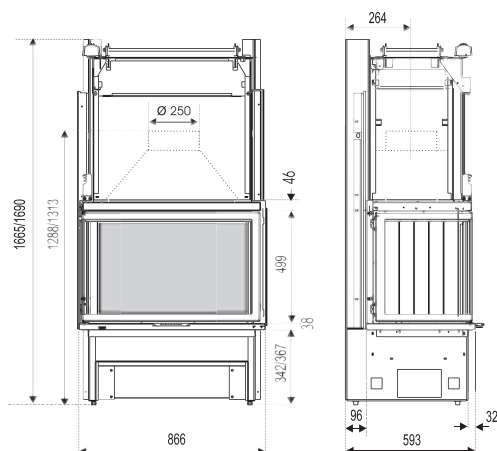

SUPRAVISION 267



SUPRAVISION 255 A



SUPRAVISION 267

-  SUPRAVISION 269
Glass front + right side
-  SUPRAVISION 267
Glass front + left side
-  SUPRAVISION 255 A
Glass front + 2 sides



MODEL	SUPRAVISION	
DOOR OPENING	LIFT-UP*	REF.
VERSIONS	255 A	111255
	267	111720
	269	111721

(*) Side opening for easy cleaning of the glass.

-  "Flamme Verte" quality charter
-  Clean glass system
-  For 50 cm logs*
-  Heating body with cast iron lining
-  Optional air distributor
-  Flue valve:
reduces wood consumption
-  Lift-up door
-  Support foot included
-  Automatic locking glass door
-  Levelling screws, for secure, stable installation
-  Optional turbines
-  Surface heated (table p. 113)



* Indication of the standard size of logs on general sale.

Strong points

- Economical and efficient
- Output 78 %
- Nominal output 10 kW (Astra 2)
- Cast iron interior; wave hearth plate
- Cast iron plates removable from the inside if replacement needed: no need to dismantle the fireplace
- Cast iron door; side opening
- Stainless steel smoke baffle
- Flue valve
- Ashpan accessible during operation 5.2 l.
- "Clean glass" system
- Options :
 - Warm air distributor DA101
 - CPI01 casing
 - Extra warm air nozzles (if DA101) Ø 125 mm
 - PS67 support foot



ASTRA 2

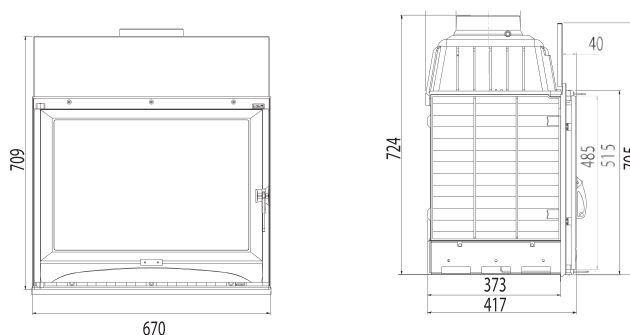

Astra 2 is also available in:
ASTRA 2 D
version with automatic door spring.



MODEL	ASTRA 2 / 2 D	
DOOR OPENING	SIDE	REF. 111893 / 111894



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



Entirely cast iron heating body



Optional air distributor



Flue valve:
reduces wood consumption



Continuous fire,
the embers last over 10 hours



Ashpan accessible
while the fire is in use



Optional support foot available



Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Strong points

- Exceptional output, compact model
- Output 75 %
- Nominal output 9 kW (Altima 106), 11 kW (Altima 105)
- Continuous fire, 10 hours (Altima 105)
- Cast iron firebox
- Stainless steel flue valve
- Ashpan accessible while the fire is in 5.2 l
- Cast iron door
- Independent ashpan door to remove the ash while the fire is in use
- "Clean glass" system
- Options :
 - KTE 152 biturbo kit
 - Support foot and warm air distributor: DA105


Altima 105 is also available in:
ALTIMA 105 D
version with automatic door spring.




ALTIMA 105



ALTIMA 106

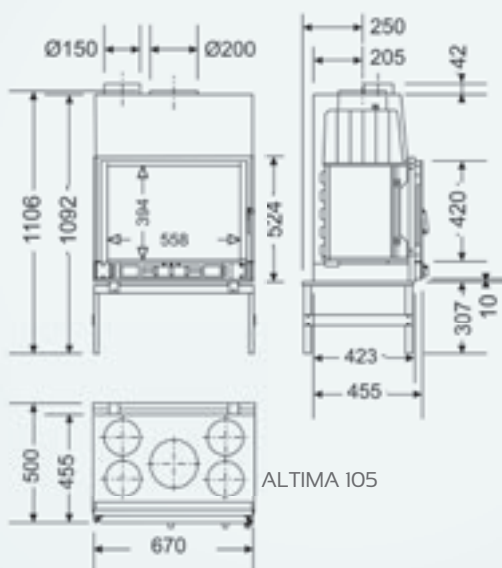

ALTIMA 105

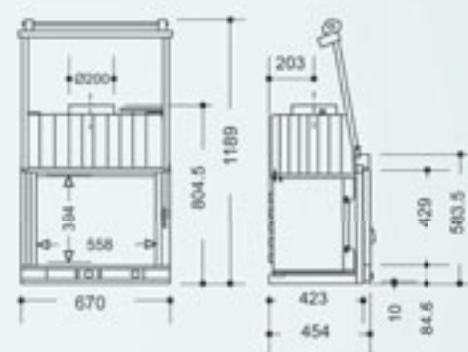

ALTIMA 106



MODEL	ALTIMA			
DOOR OPENING	SIDE	REF.	LIFT-UP*	REF.
VERSIONS	105	111126	106	111127
	105 D	111128		

(*) Side opening for easy cleaning of the glass.



"Flamme Verte" quality charter



Clean glass system



For 50 cm logs*



Entirely cast iron heating body



Optional air distributor



Flue valve:
reduces wood consumption



Altima 105

Continuous fire, the embers last over 10 hours



Ashpan accessible while the fire is in use



Altima 106

Lift-up door



Optional support foot available



Optional turbines



Altima 106

Surface heated (table p. 113)



Altima 105

Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Strong points

- Outstanding performance
- Continuous fire, 10 hours (except 162C-168C)
- Cast iron firebox
- Cast iron plates removable from the inside of the firebox: if replacement is needed, no need to dismantle the fireplace!
- Automatic flue valve
- Large ashpan : 7 l.
- Independent ashpan door to remove the ash while the fire is in use
- "Clean glass" system



148 C
Output 73 %
Nominal output 13 kW
Side-opening door
Optional:
• Grill kit



150 C
Output 73 %
Nominal output 13 kW, 9 kW (150 CD)
Side-opening door
Support foot and casing included
Options :
• CDA 150 C cover
• KTE 152 biturbo kit
• 2 extra hot air nozzles (if CDA 150 C) ø 150 mm
• Grill kit






AUTOMATIC OPENING FLUE VALVE




When the door is opened, the flue valves opens automatically. This prevents a maximum of smoke billowing out into the room.



150 C / 150 CD



148 C



150 C / 150 CD

MODEL	CLASSIQUES			
DOOR OPENING	SIDE	REF.	LIFT-UP*	REF.
VERSIONS	148 C	111401	162 C	111412
	150 C	111400		
	152 C	111410		
	150 CD	111408	168 C	111411
	152 CD	111409		

(*) Side opening for easy cleaning of the glass.

Classiques






- 152 C
Output 73 %
Nominal output 13 kW, 9 kW (152 CD)
Side-opening door
Support foot and air distributor included
Options :
• KTE 152 biturbo kit
• 2 extra hot air nozzles
ø 150 mm
• Grill kit






- 162 C
Output 70 %
Nominal output 11 kW
Lift-up and side opening door
Support foot and air distributor included
Options :
• KTE 152 biturbo kit
• 2 extra hot air nozzles
ø 150 mm
• Grill kit



- 168 C
Output 70 %
Nominal output 11 kW
Lift-up and side opening door
Options :
• CDA 168 C (if DA 168 C) cover
• DA 168 C with support foot included
• 2 extra hot air nozzles
ø 150 mm (if DA 168 C)
• Grill kit
• KTE 152 (if DA 168 C)



152 C / 152 CD

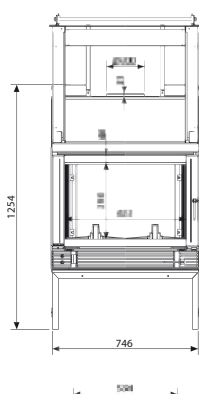

162 C / 168 C

The "Classiques" fireboxes 150 C and 152 C are also available in:
150 CD AND 152 CD
versions with automatic door spring.



Continuous fire, the embers last over 10 hours



Ashpan accessible while the fire is in use



Lift-up door



Support foot included



Optional turbines



Optional grill



Surface heated (table p. 113)



Surface heated (table p. 113)



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



Entirely cast iron heating body



Air distributor included



Flue valve: reduces wood consumption

* Indication of the standard size of logs on general sale.

Strong points


- 100% airtight firebox
- Output 81 %
- Nominal output 10 kW
- 10 hours continuous burning
- All glass front (Temporis 3D)
- Cast iron interior
- IN'AIR module with external air inlet
- Adjustable double combustion air circuit with pre-heated secondary air
- "Triple envelope" combustion chamber
- Double-envelope INOXIS HR smoke baffle
- Large ashpan
- Support foot
- Warm air distributor
- Options :
 - KTE 152 biturbo kit
 - 2 extra warm air nozzles
ø 150 mm or 4 nozzles ø 125 mm



Temporis 2 D



Temporis 3 D

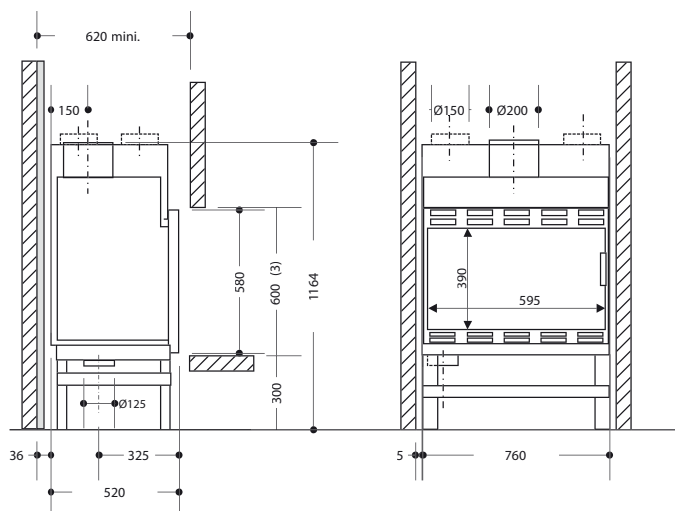

MODEL	TEMPORIS	
DOOR OPENING	SIDE	REF.
VERSIONS	2 D	111863
	3 D	111892



"Flamme Verte" quality charter



Clean glass system



For 50 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Heating body with cast iron lining



Air distributor included



Continuous fire, the embers last over 10 hours



Support foot included



Pre-heating of the secondary air in a special heat exchanger



Smoke collector with Innox HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



Smoke flue with collector: allows any condensate to be burned completely



IN'AIR connection module, for operation independently of the mechanical ventilation system



Optional turbines




Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

[NEW]

Strong points

- Firebox insert
- Easy installation
- Output 74 %
- Nominal output 9 kW
- All screen-printed glass front (Oréa 58)
- Cast iron door (Oréa 59)
- "Wave" decor hearth plate
- 10 hours continuous burning
- Large ashpan
- Stainless steel smoke baffle
- Options :
 - AT01 draught adapter
 - PS 67 support foot
 - Warm air nozzles (natural convection only)

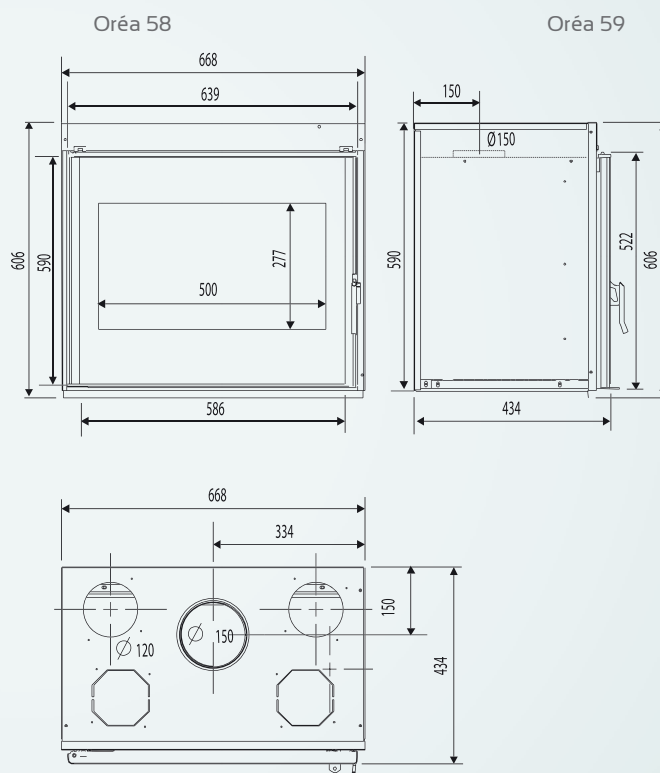

Oréa 58 is also available in:
ORÉA 58 D
 version with automatic
 door spring.



MODEL	ORÉA	
DOOR OPENING	SIDE	REF.
VERSIONS	58	111897
	58 D	111935
	59	111961



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



Air distributor included



Continuous fire, the embers last over 10 hours



Ashpan accessible while the fire is in use



Optional support foot available



Smoke collector with Innox HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

TERTIO FIREBOX-INSERTS

MADE-TO-MEASURE "READY HEATING"

Designed for use in an existing or new fireplace, TERTIO firebox-inserts transform a fireplace into a real heating appliance.

TERTIO is a complete firebox-insert concept that can be integrated into a new fireplace (as a firebox) or existing fireplace (as an insert), adapting to all configurations.

A large glass surface area and a cast iron front contribute to the fireplace's attractiveness. 3 sizes and 16 models to adapt to any fireplace: with 3 widths and 6 heights, with or without a Turbo, there is always a solution for your fireplace.

"Continuous burning" for real heating performances: the heating body is designed to guarantee the embers will last over 10 hours*. Most Tertio models are classified "continuous burning".

* In the conditions of installation and use described in the instructions.

PERFECT DISTRIBUTION OF THE HEAT

Thanks to their high tech design, TERTIO firebox-inserts provide optimum heat distribution.

- The tangential turbine provides accelerated air flows and therefore perfect diffusion of the warm air.
- If the appliance is used as a firebox, the warm air distributor box can be used to heat one or more other rooms, by connecting up warm air distribution ducts.
- If it is used as insert (in an existing fireplace), warm air distribution is forbidden. A very large warm air outlet at the front of the appliance heats the main room.



THE TERTIO RANGE: ALL THE OPTIONS OF A REAL HEATING APPLIANCE

- ① 2 or 4 nozzles with $\varnothing$ 125 or 150 mm (only when used as a firebox), to distribute the warm air to other rooms.
- ② Two-speed turbine**: extra flat, equipped with a thermostat.
- ③ Support foot kit: to adapt the height of the firebox to the dimensions of SUPRA fireplaces.

** not adaptable to SUPRA fireplaces.



TERTIO firebox-inserts are certified NF.

Tertio

Side view 1 side



Strong points

- Side view, 1 side
- Use as a firebox in a new fireplace or as insert (to add to an existing fireplace)
- Double-envelope stainless steel smoke baffle. Considerably increases the output and efficiency of the fire
- Nozzle removable from the inside; easy to install
- Side window supplied on the right side, can be reversed to the left on installation
- "Clean glass" system



TERTIO 67 VL1
Width 67 cm
Output 77 %
Nominal output 9 kW
Window on right
(can be reversed to left)
Options :

- Warm air nozzles
ø 125 or 150 mm
- KT67 turbine kit
- PS67 support foot
- Beam protection kit



TERTIO 76 VL1
Width 76 cm
Output 70 %
Nominal output 11 kW
Window on right
(can be reversed to left)
Options :

- Warm air nozzles
ø 125 or 150 mm
- KT76 turbine kit
- PS76 support foot
- Beam protection kit

The TERTIO 67 VL1 and 76 VL1 are also available in:
67 VL1 D AND 76 VL1 D
versions with automatic door spring.

MODEL	TERTIO	
DOOR OPENING	SIDE	REF.
VERSIONS	67 VL1	111204
	76 VL1	111207
	67 VL1 D	111211
	76 VL1 D	111214



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



Triple envelope heating body (2 + 1):
airtight combustion chamber + interior lining
+ third envelope for greater safety



Heating body with cast iron lining



Air distributor included



Ashpan accessible while
the fire is in use



Optional support foot available



Smoke collector with Inoxis HR smoke
baffle: helps concentrate the heat and
amplifies the clean glass system



Optional turbines



Surface heated (table p. 113)



Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Tertio



Side view, 2 sides

Strong points


- Use as a built-in fire in a new fireplace or as a insert-firebox (to add to an existing fireplace)
- Connection nozzle removable from the inside; easy to install; easy to maintain
- "Clean glass" system
- Automatic door spring (models D)




TERTIO 67 VL2 D
Width 67 cm
Output : 75 %
Nominal output 8 kW
3 glass sides



TERTIO 76 VL2 D
Width 76 cm
Output : 75 %
Nominal output 9,5 kW
3 glass sides

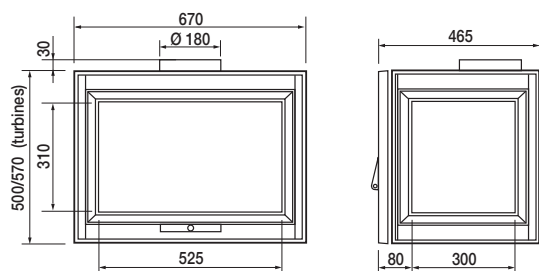

Tertio 67 VL2 D

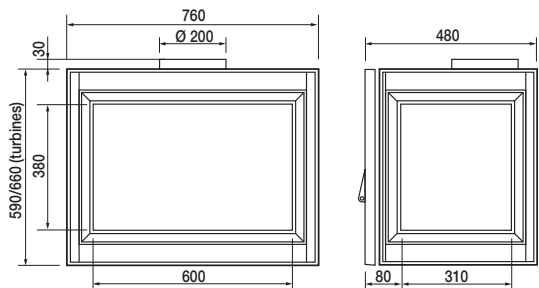

Tertio 76 VL2 D

MODEL	TERTIO	
	DOOR OPENING	REF.
VERSIONS	67 VL2 D	111212
	76 VL2 D	111447



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



For 33 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Heating body with cast iron lining



Air distributor included



Continuous fire, the embers last over 10 hours



Ashpan accessible while the fire is in use



Optional support foot available



Smoke collector with Inoxis HR smoke baffle: helps concentrate the heat and amplifies the clean glass system



Optional turbines



Surface heated (table p. 113)



Surface heated (table p. 113)



Surface heated (table p. 113)



Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

Tertio

Cast iron door



TERTIO 55
Width 55 cm
Output : 70 %
Nominal output 7 kW
2 nozzles ø 125 mm included
Options :
• KT55 turbine kit
• P555 support foot
• Beam protection kit
• CF 55 trim frame



TERTIO 69
Width 67 cm
Output : 77 %
Nominal output 9 kW
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles
ø 125 mm or 150 mm
• KT67 turbine kit
• P567 support foot
• Beam protection kit
• T67 Orféo decorative front
• CF 67 trim frame



TERTIO 67
Width 67 cm
Output : 77 %
Nominal output 9 kW
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles ø 125
or 150 mm
• KT67 turbine kit
• P567 support foot
• Beam protection kit
• T67 Orféo decorative front
• CF 67 trim frame



TERTIO 76
Width 76 cm
Output : 70 %
Nominal output 12 kW
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles
ø 125 mm or 150 mm
• KT76 turbine kit
• P576 support foot
• Beam protection kit
• T67 Orféo decorative front
• CF 67 trim frame

HEARTH PLATE

Exclusive: 1 plate, 2 themes*

Turn for a choice of theme.

Tertio 67 - 76 -
670 V - 760 V


Tertio 69 - 79 - 690 V - 790 V
64 - 74 - 640 V - 740 V



"Rustic" trim



"Wave" trim



"Contemporary" trim



"Classic" trim

*(except Tertio 55 and 54)



TERTIO 79
Width 76 cm
Output : 70 %
Nominal output 12 kW
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles
ø 125 mm or 150 mm
• KT76 turbine kit
• P576 support foot
• Beam protection kit
• T76 Orféo decorative front
• CF 76 trim frame

MODEL	TERTIO		
DOOR OPENING	SIDE	REF.	DIMENSIONS LxHxP
VERSIONS	55	III200	55x44x35 cm
	67	III201	67x50x46 cm
	69	III765	67x50x46 cm
	76	III202	76x59x48 cm
	79	III768	76x59x48 cm
	67 D	III210	67x50x46 cm
	76 D	III213	76x59x48 cm

TERTIO 67 and 76
are also available in:

67 D AND 76 D

versions with automatic door spring.

Tertio

All glass door

Strong points

- Use as a built-in fire in a new fireplace or as a insert-firebox (to add to an existing fireplace)
- Double-envelope stainless steel smoke baffle.
- Connection nozzle removable from the inside; easy to install; easy to maintain
- "Clean glass" system



TERTIO 74
Width 76 cm
Output 70 %
Nominal output 12 kW
All glass door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles ø 125 mm or 150 mm
• KT76 turbine kit
• P576 support foot
• Beam protection kit
• T76 Orféo decorative front
• CF 76 trim frame



TERTIO 54
Width 55 cm
Output 70 %
Nominal output 7 kW
All glass door
2 nozzles ø 125 mm included
Options :
• KT55 turbine kit
• P555 support foot
• Beam protection kit
• CF 55 trim frame.



TERTIO 64
Width 67 cm
Output 77 %
Nominal output 9 kW
All glass door
10 hours continuous burning
Reversible hearth plate
Options :
• Warm air nozzles ø 125 mm or 150 mm
• KT67 turbine kit
• P567 support foot
• Beam protection kit
• T67 Orféo decorative front
• CF 67 trim frame



Adaptable to the ORFEO range of decorative fronts

See page 10

TERTIO 54, 64 and 74 are also available in:
54 D, 64 D AND 74 D versions with automatic door spring.



Tertio 74

MODEL	TERTIO		
	DOOR OPENING	SIDE	REF. DIMENSIONS W X H X D
VERSIONS		54	111877 55x44x39 cm
		64	111879 67x50x46 cm
		74	111881 76x59x48 cm
		54 D	111883 55x44x39 cm
		64 D	111884 67x50x46 cm
		74 D	111885 76x59x48 cm

TERTIO AND TERTIO TURBO



"Flamme Verte" quality charter



French standard



Clean glass system



For 50 cm logs*



For 33 cm logs*



Triple envelope heating body (2 + 1): airtight combustion chamber + interior lining + third envelope for greater safety



Heating body with cast iron lining



Air distributor included



Continuous fire, the embers last over 10 hours



Ashpan accessible while the fire is in use



Optional support foot available



Optional turbines



Surface heated (table p. 113)



Surface heated (table p. 113)



Surface heated (table p. 113)

* Indication of the standard size of logs on general sale.

DZ Dal Zotto



DAL ZOTTO - KAMINSKI VLOŽKI

DAL ZOTTO - VLOŽEK 700 NA DRVA

litoželezna vrata
 obojestransko odpiranje vrat desno in levo
 kontrolirano zračenje skozi zid
 zračne reže
 priprava za dodatno ventilacijo
 litoželezno kurišče



	mm	1023x845x668
	Kg	200
	Kw	6,5
	m³	186
	Si	
	Si	
	mm	S/P 150
	mm	210x270
	mm	270x340x400
	mm	330x298x410
	Si	
	%	78,9
	Kg/h	1,9
	BO-PE	
	%	0,11

Legenda barv:

BI	bela	BO	temno rdeča (bordo)
MI	svetlo rjava (barva medu)	CP	svetlo rjava osenčena (kapučino)
GR	siva	PE	bež (pergament)
VE	zelena	NE	temno siva (antracit)
MF	svetlo rjava osenčena (kostanjeva)	CR	umazano bela (barva smetane)
GP	rumena pikčasta	PIETRA	strukturiran kamen

Stone d.o.o., Razstavni salon, Zaloška 54, 1000 Ljubljana

Telefon: 01 54 27 260

Fax: 01 54 27 264

E-mail: salon@stone.si

<http://www.stone.si>

DAL ZOTTO - VLOŽEK 700 NA PELETE

vrata iz kristala
daljinski upravljaliec in časovni termostat
litoželezno kurišče



	mm	700x550x489
	Kg	115
	Kw	3/6,2
	Min/Max	
	Kw	3,5/7,8
	Min/Max	
	Kg	12
	Kg/h	0,7/1,6
	Min/Max	
	W	80/300
	Min/Max	
	m³	142
		Si
		Si
		Si
		Si
		Si
	%	85,9/80,8
	Min/Max	
	%	0,014/0,007
	Min/Max	

Stone d.o.o., Razstavni salon, Zaloška 54, 1000 Ljubljana

Telefon: 01 54 27 260

Fax: 01 54 27 264

E-mail: salon@stone.si

<http://www.stone.si>